



WNS Lowery
2221 SE 69th St
Oklahoma City, OK 73149
(405) 677-7222

Series PRL Polished Rod Lubricator

The WNS Lowery Series PRL Polished Rod Lubricator provides exceptional lubrication to the polished rod in a simple and cost-effective way. The additional lubrication reduces heat and rod damage caused by friction while also extending the life of the Stuffing Box and Packing Rubbers. The simple clam shell design provides easy installation.

Features:


- Rugged cast aluminum design
- Simple installation
- Multiple wick sizes available
- Comes with 2 tie-down chains

Applications:

- Artificial Lift Wellheads

Installation

1. Remove any shipping materials from the Polished Rod Lubricator. Remove the pin on the opposite side of the springs.
2. Open the lubricator and inspect the Wicks to ensure they are positioned properly then install onto the polished rod.
3. Reinstall the pin to ensure the lubricator does not accidentally open and fall off the polished rod.
4. Attach the 2 tie-down chains to the lubricator and the Christmas tree, most commonly the stuffing box.
5. Open the covers and fill with oil. Then close the covers to minimize any foreign contaminants.

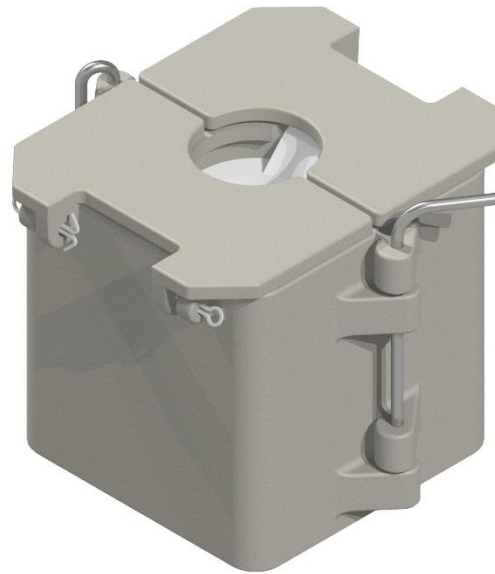

Specifications

	Model 302/302SG
Oil Capacity	1 qt
Dimensions (HxW)	5.5" x 6.5"
Wick Sizes	1" thru 1 3/4"